

IS5101



Inductive sensor


IS-3002-BPKG/0,145M/-H

phase-out article

Discontinuation date: 03/31/2026

Alternative articles: IS5001

When selecting an alternative article and accessories please note that technical data may differ!

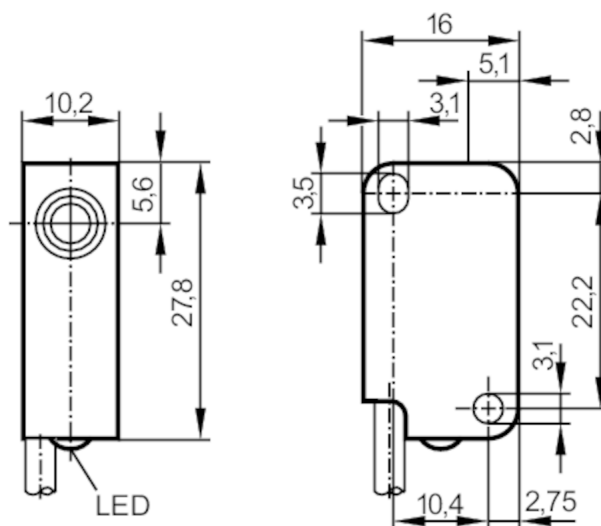

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	2
Housing	rectangular
Dimensions [mm]	28 x 10 x 16

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	< 15
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	800
Short-circuit protection	yes
Overload protection	yes

IS5101



Inductive sensor

IS-3002-BPKG/0,145M/-H

Detection zone		
Sensing range	[mm]	2
Real sensing range Sr	[mm]	2 ± 10 %
Operating distance	[mm]	0...1.6
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	3...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 61000-4-2 ESD	8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[years]	3044
Mechanical data		
Weight	[g]	14.2
Housing		rectangular
Mounting		flush mountable
Dimensions	[mm]	28 x 10 x 16
Materials		PBT
Tightening torque	[Nm]	< 0.5; (with washer)
Displays / operating elements		
Display	switching status	1 x LED, yellow
Remarks		
Pack quantity		1 pcs.

IS5101




Inductive sensor

IS-3002-BPKG/0,145M/-H

Electrical connection

Cable: 0.145 m, PVC; 3 x 0.34 mm²

Connection

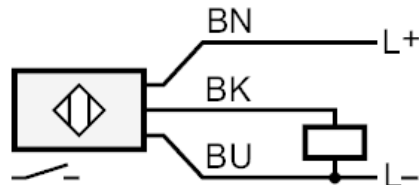

BN =	Core colours :
BU =	brown
BK =	blue
	black