


LDH100



Oil humidity sensor

OIL HUMIDITY SENSOR

For 8-pole sockets the core colours are not standardised.
Please note the wiring of the sensor and the sockets (see data sheet).

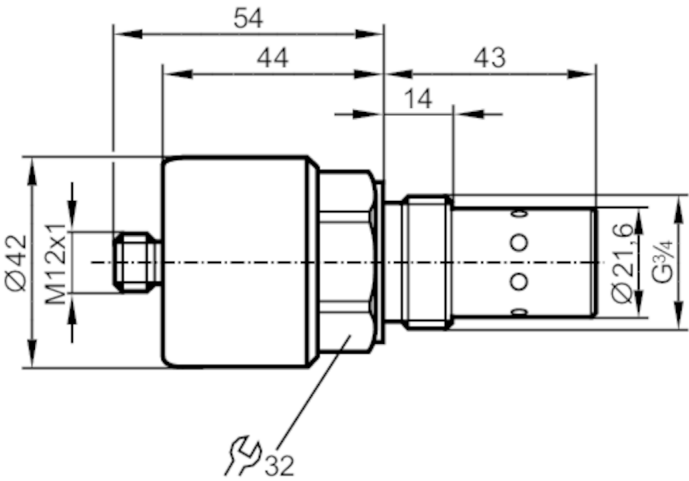


Product characteristics		
Number of inputs and outputs	Number of analogue outputs: 2	
Process connection	G 3/4	
Application		
Media	mineral oils; synthetic esters; biodegradable oils	
Tank pressure	50 bar	5 MPa
Oil		
Medium temperature	[°C]	-40...105
Electrical data		
Operating voltage	[V]	9...33 DC
Current consumption	[mA]	< 25
Protection class		III
Reverse polarity protection		no
Measuring principle		capacitive
Inputs / outputs		
Number of inputs and outputs	Number of analogue outputs: 2	
Outputs		
Total number of outputs		2
Number of analogue outputs		2
Analogue current output	[mA]	4...20
Max. load	[Ω]	(U _b - 8) x 25
Resolution of analogue output		φ: 1% / T: 0.1 K

LDH100



Oil humidity sensor

OIL HUMIDITY SENSOR

Measuring/setting range		
Temperature monitoring		
Measuring range	[°C]	-20...120
Accuracy / deviations		
Accuracy		φ : $\pm 3 \%$ / T: $\pm 2 \%$
Response times		
Response time	[s]	1.3
Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	100
Protection		IP 67
Tests / approvals		
EMC	EN 13309	
	IEC 61000-6-2	: 2005
	IEC 61000-6-4	: 2006 + AMD1: 2010
Vibration resistance		test following DIN EN 60068-2-6
MTTF	[years]	90
Mechanical data		
Weight	[g]	169
Materials (wetted parts)		aluminium; HNBR; polyurethane resin; epoxy resin
Process connection		G 3/4
Remarks		
Remarks		accuracy values expressed in percent refer to the measuring span
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A		
		


LDH100



Oil humidity sensor

OIL HUMIDITY SENSOR

Connection

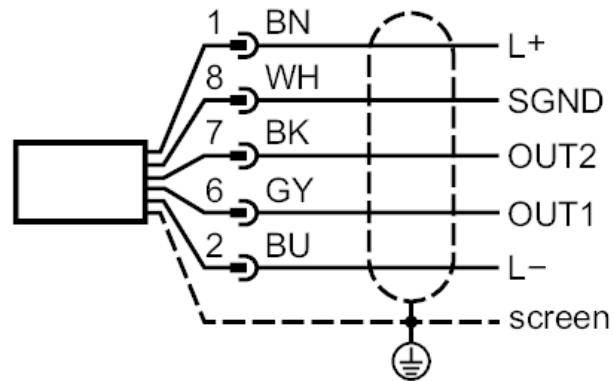

SGND: signal ground
OUT1: oil temperature
OUT2: relative humidity