


LMT392



Sensor for point level detection

LMCCE-A01E-QPKG-2/US

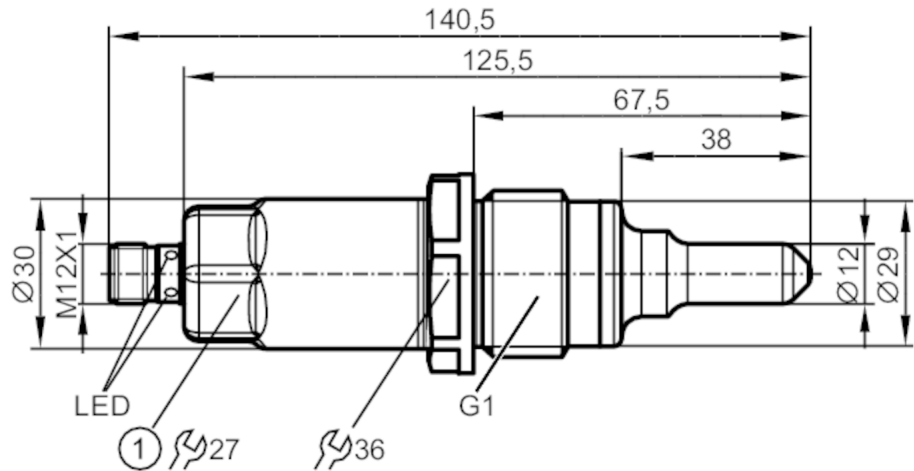

1 Tightening torque 35 Nm



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2
Factory setting	hydrous media
Process connection	G 1 external thread

Application

Special feature	Gold-plated contacts
Installation	suited for installation in existing tuning fork adapters
Media	Liquids
Recommended media	water; hydrous media; oils; oil-based media
Cannot be used for	See the operating instructions, chapter "Function and features".
Probe length [mm]	38
Tank pressure	-1...40; (applications subject to the German Federal Water Act : -0,5...10 bar) bar
	-0.1...4; (applications subject to the German Federal Water Act : -0,5...10 bar) MPa

Oil		
Medium temperature	[°C]	-25...100; (applications subject to the German Federal Water Act 0...100 °C)
Medium temperature short time	[°C]	-25...150; (1 h; applications subject to the German Federal Water Act : 0...100 °C)
Water		
Medium temperature	[°C]	-25...85; (applications subject to the German Federal Water Act : 0...85 °C)
Medium temperature short time	[°C]	-25...150; (1 h; applications subject to the German Federal Water Act : 0...100 °C)

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes
Measuring principle	capacitive

LMT392



Sensor for point level detection

LMCCE-A01E-QPKG-2/US

Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2	
Outputs			
Total number of outputs		2	
Output signal		switching signal; IO-Link	
Electrical design		PNP	
Number of digital outputs		2	
Max. voltage drop switching output DC [V]		2.5	
Permanent current rating of switching output DC [mA]		100	
Short-circuit protection		yes	
Type of short-circuit protection		pulsed	
Overload protection		yes	
Measuring/setting range			
Factory setting		hydrous media	
Response times			
Response time [s]		< 0.5	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	
IO-Link revision		1.1	
SDCI standard		IEC 61131-9	
SIO mode		yes	
Required master port type		A	
Process data analogue		1	
Process data binary		2	
Min. process cycle time [ms]		2.3	
Supported DeviceIDs		Type of operation	DeviceID
		default	449
Operating conditions			
Ambient temperature [°C]		-20...85	
Note on ambient temperature		Medium temperature 100...150 °C	
		-40...60 °C	
Storage temperature [°C]		-40...85	
Protection		IP 68; IP 69K	
Tests / approvals			
Approval		WHG; General building authority approval; overflow prevention	
EMC		DIN EN 61000-6-2	
		DIN EN 61000-6-4	open tanks
		DIN EN 61000-6-3	closed tanks
Shock resistance		DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance		DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]		222.77	

LMT392



Sensor for point level detection

LMCCE-A01E-QPKG-2/US

UL approval	UL approval no.	H001
-------------	-----------------	------

Mechanical data

Weight	[g]	398.5
Dimensions	[mm]	Ø 30 / L = 125.5
Materials		stainless steel (316L/1.4404); PEEK; PEI; FKM
Materials (wetted parts)		PEEK surface characteristics: Ra < 0,8 µm / Rz = 4 µm
Process connection		G 1 external thread

Displays / operating elements


Display	switching status	LED, yellow
	operating status	LED, green

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

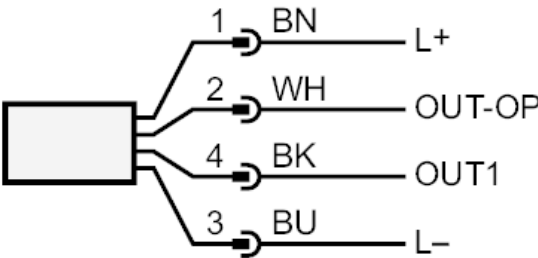

OUT1:	switching output
OUT-OP	switching output overflow prevention to the German Federal Water Act (WHG)
	colours to DIN EN 60947-5-2
	Core colours :
BK =	black
BN =	brown
BU =	blue
WH =	white